


SL2700

Great
Wide

ID

The SKYLINE SL2700 is one of the greatest lift-and-slide systems in the world, an awe-inspiring feat for contemporary architecture! Attractive and effective slim-frame-lines, excellent thermal insulation values and high-quality components create an exceptionally uplifting atmosphere.

- Ultimate high-end look grants freedom
- Wide span structures are perfectly fulfilled
- Exceptional performance for virtually all environments
- All-glass corners as well as 90° open corners are possible
- A complete range of tracks
- Impressively smooth sliding and easy to handle
- Minimal design for modern architecture
- Impressive transparency and maximum light penetration
- More flexibility in locking
- The Hotel Solution meet the higher standards of hoteliers

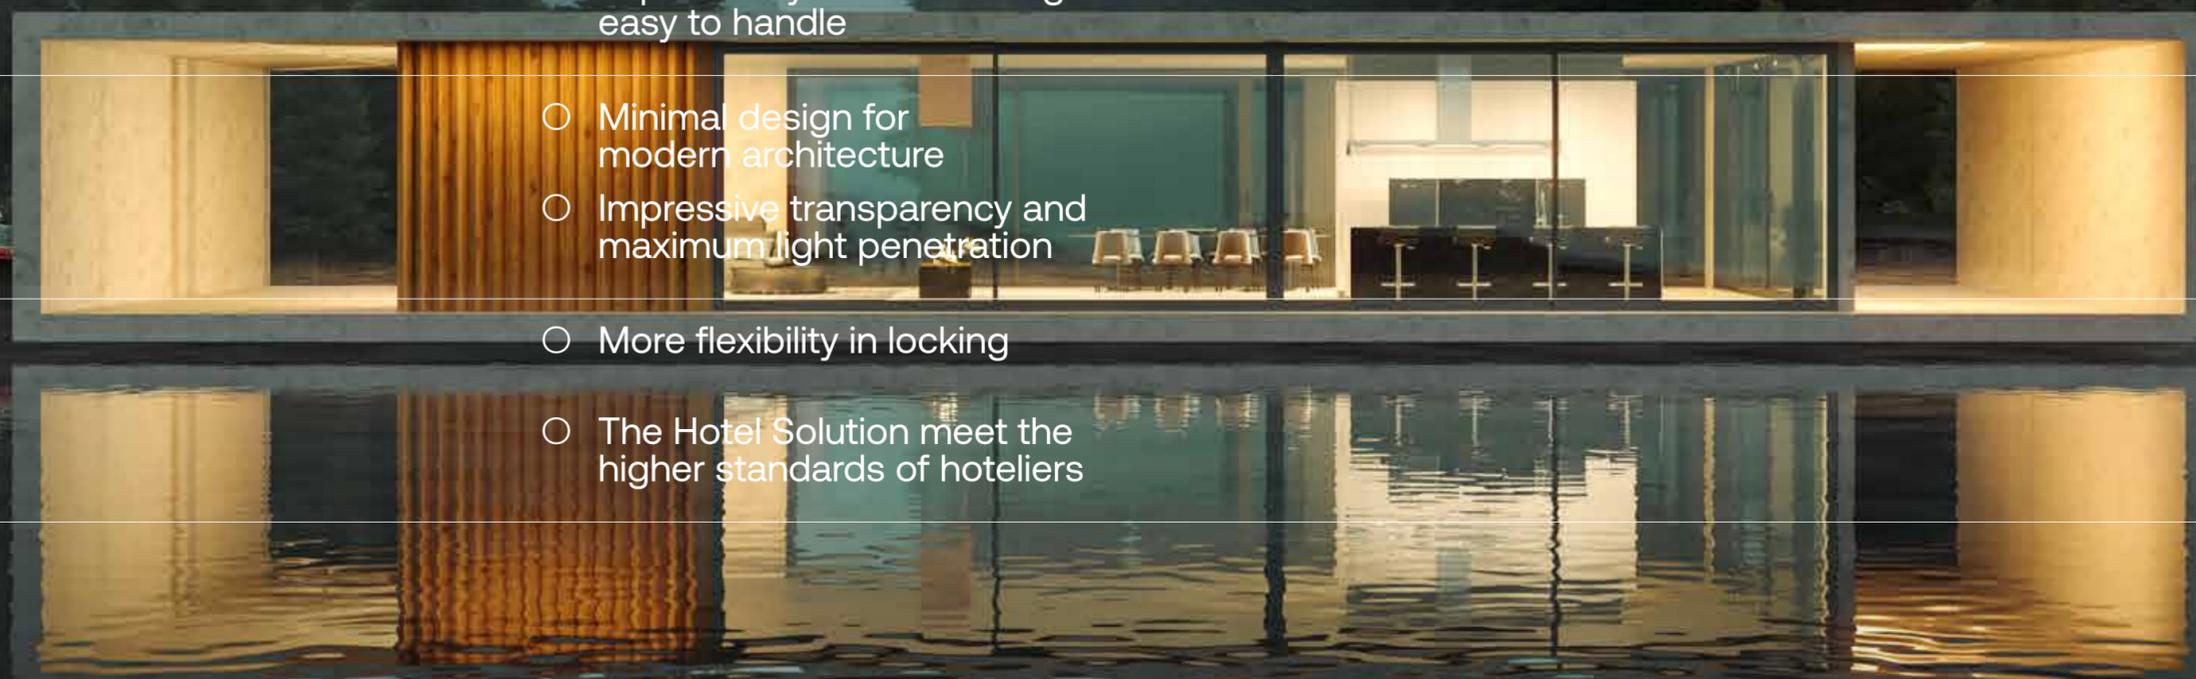








TC

Hidden Track

Flat Track

Interlock

Side Frame

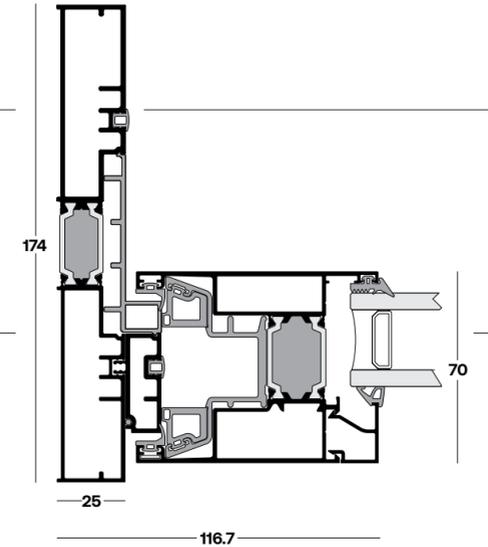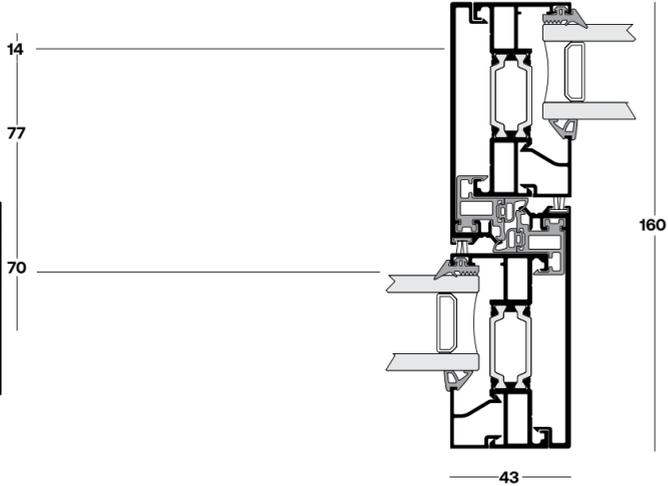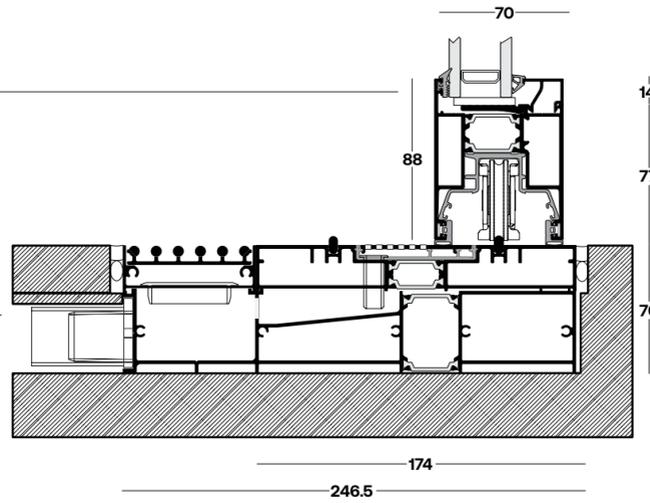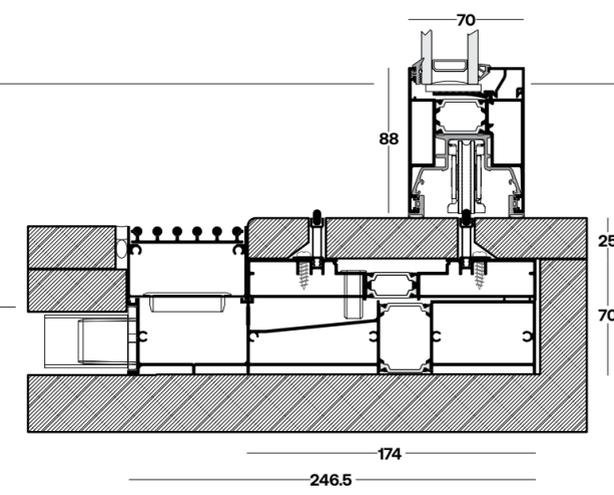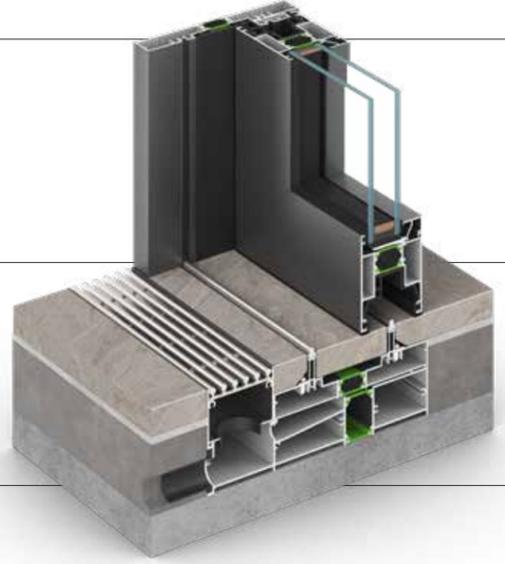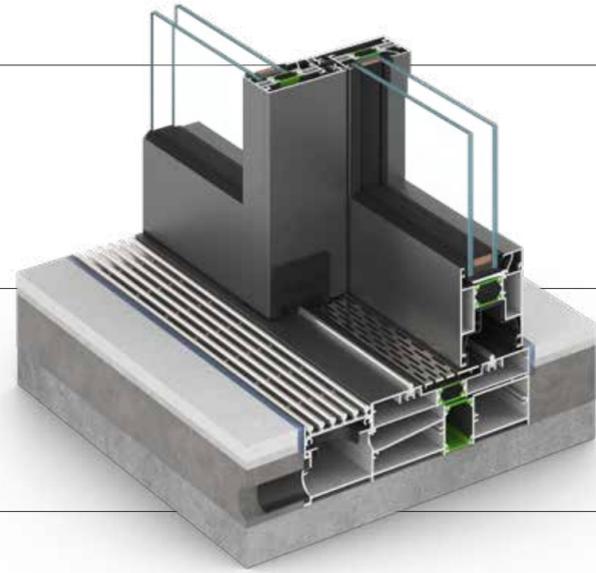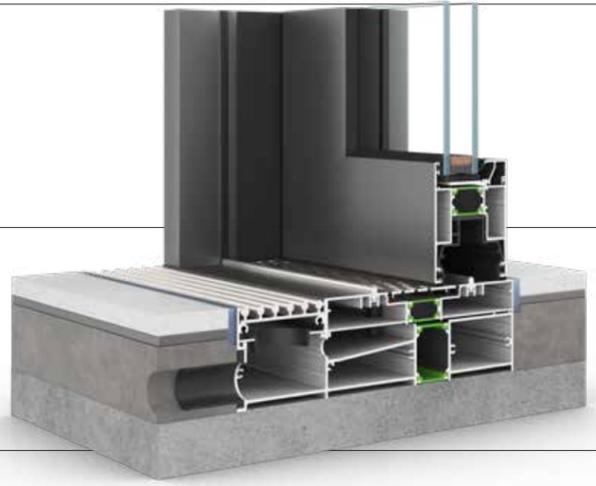


→ System Configurations

→ Technical Data




● One Fixed & One Movable Sash

● Two Movable Sashes

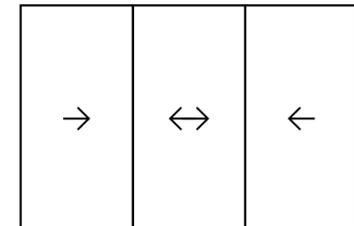

● Three Movable Sashes

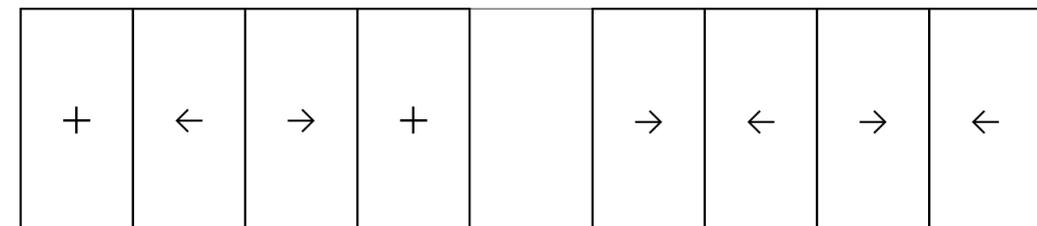

● Two Side Fixed & Two Central Movable Sashes

● Four Movable Sashes

○ Category

- Exterior Shapes
- Window / door Types
- Track Width
- Minimum Track Height

▾ Value

- Flat / Contemporary look with narrow interlock & reduced sightlines
- Lift-and-slide
- 174 mm
- 25 mm

- Visible Aluminum Face Width (Interlock)
- Maximum Sash Width
- Maximum Sash Height
- Maximum Sash Weight

- 43 mm
- 3000 mm
- 3000 mm
- Up to 400 Kg

● Sealing Method

→ Perimetrical with EPDM gaskets & multi-layer brushes

● Hardware

→ L&S mechanism & rollers with standard or hook version, locking points

● Glass Type

→ Double / Triple

● Glass Thicknesses

→ From 24 mm to 52 mm

● Type Of Thermal Insulation

→ Polyamides of 30 mm, Insulation Foam

→ System Performances

○ Category

- Thermal
- Air Permeability
- Water Tightness
- Wind Load Resistance
- Acoustic

▾ Value

- Uf values from 1.7 W/(m²K)
- Class 4
- Class 9A
- Class B4
- 42 dB

